


Alsycos ThermEco Wall

Features:

- PG50 – internal & external sightline of 50mm
- FG50 – internal & external sightline of 50/81mm
- Complies with AAAMSA A4 design standards
- Accommodates glazing from 2mm to 30mm
- Available in a range of durable & popular architectural colours & finishes
- Allows the use of 2 different finishes on a project
- Pressure equalization ensures rapid drainage
- EPDM gaskets ensure excellent sealing against water & air infiltration
- Mullion depths range from 121mm to 205mm
- Transom depths range from 78mm to 183mm
- Mullion inertia (IX-Windload) ranges from 122 cm⁴ to 766 cm⁴
- Transom inertia
 - IX-Windload ranges from 37 cm⁴ to 395 cm⁴
 - IY-Windload ranges from 18 cm⁴ to 51 cm⁴
- Accommodates opening sashes
- Innovative assembly techniques reduce manufacturing & installation labour costs
- Manufacturing tools and jigs ensure production & installation accuracy
- Product training & manuals available
- Estimating software available

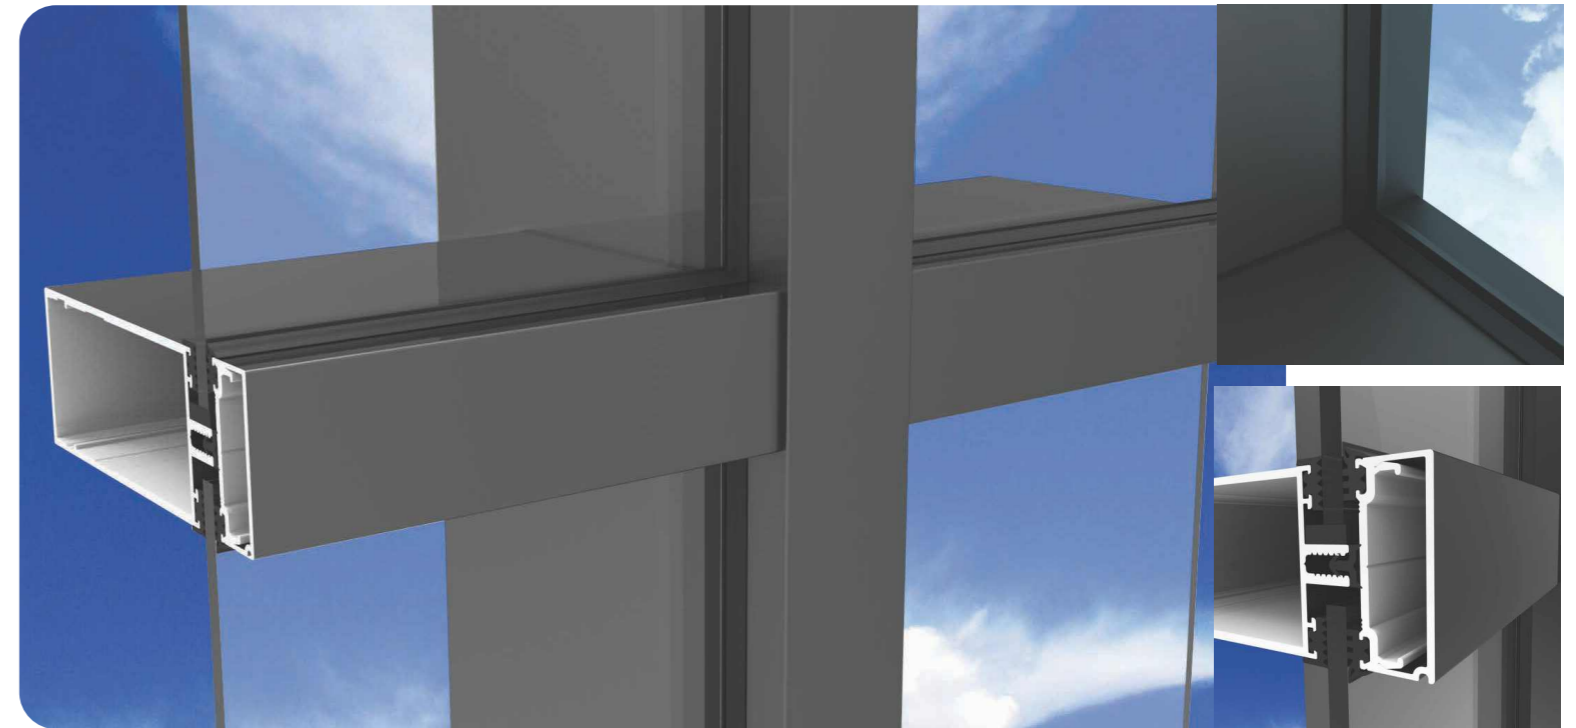

FG 50 CurtainWall

